



Test Report: LRS-150-24

150W Single Output Switching Power Supply

DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

SAFETY & E.M.C. TEST

Safety Test

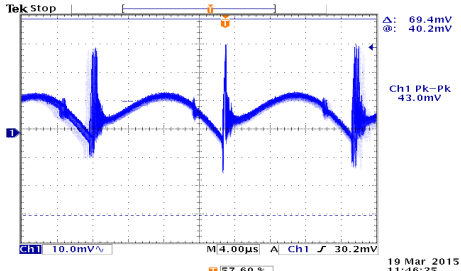
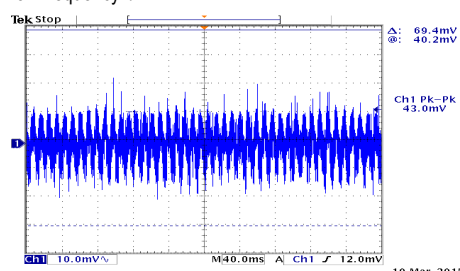
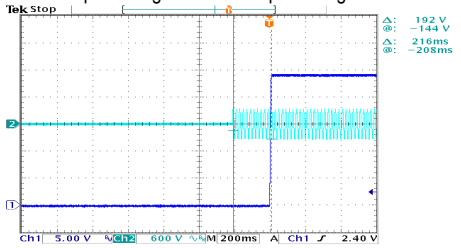
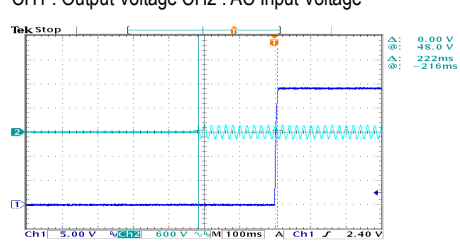
E.M.C. Test

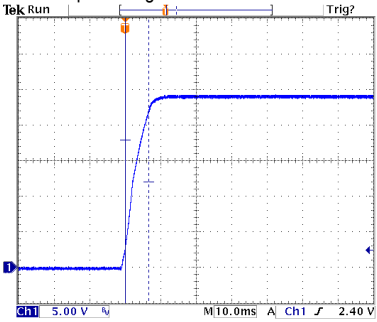
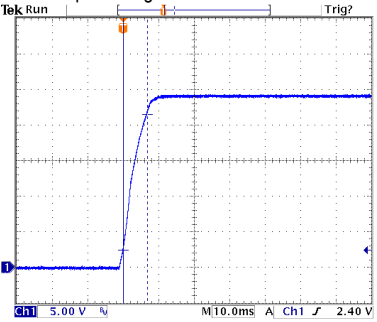
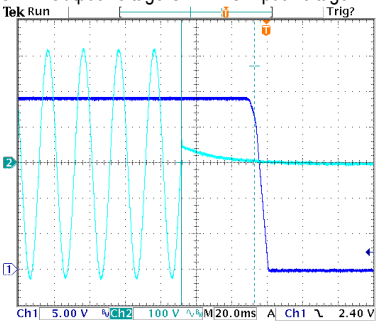
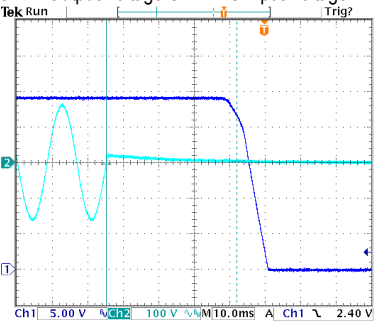
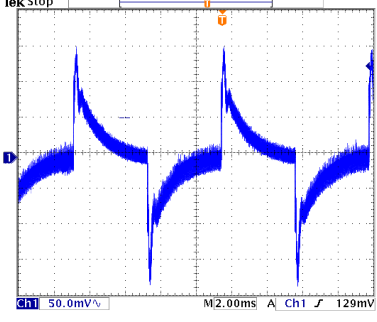
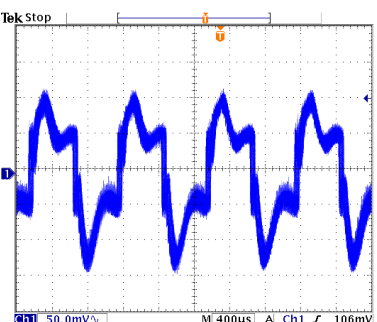
RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

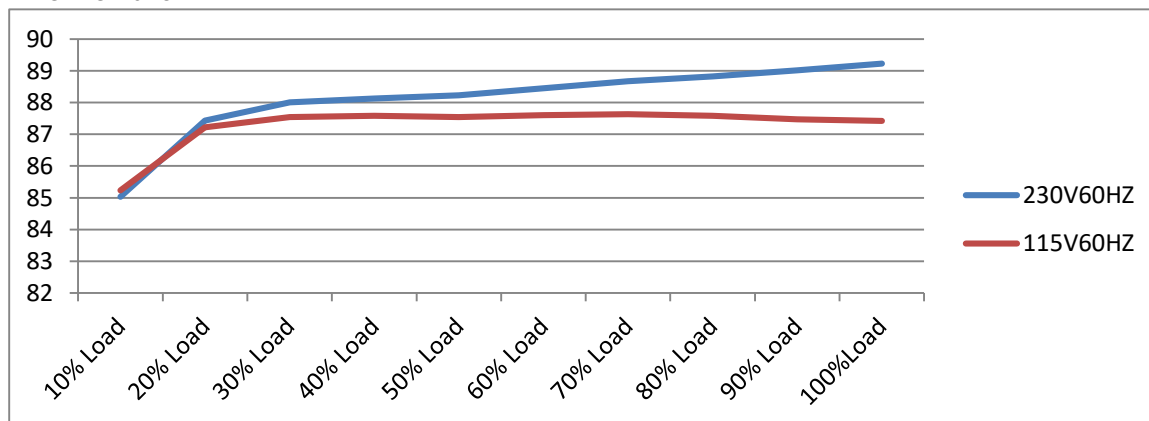
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21.6 V~ 28.8 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	20.61V~30.35V/230VAC 20.61V~30.35V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1 %~ -1 %	I/P: 100~132VAC/200~264VAC by switch O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0 %~0.04%
3	LINE REGULATION (Max)	V1: 0.5 %~ -0.5 %	I/P: 100~132VAC/200~264VAC by switch O/P:FULL LOAD Ta:25°C	V1:0 %~0.04%
4	LOAD REGULATION(Max)	V1: 0.5 %~ -0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0%~0 %
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 43.0 mVp-p
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/500ms 115VAC/500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/216 ms 115VAC/ 222ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 				

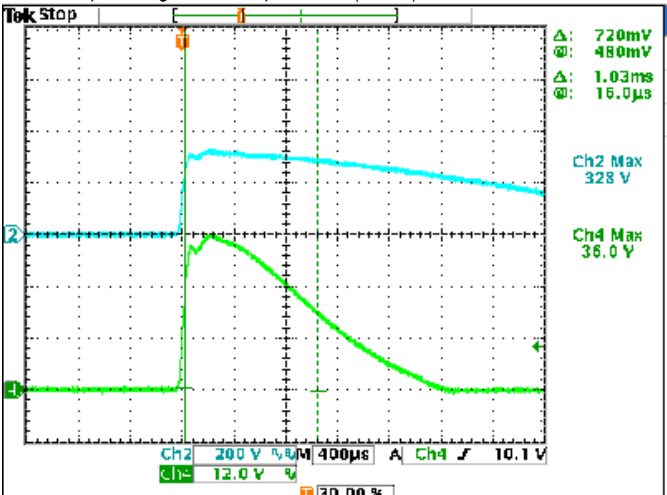
8	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/6.6 ms 115VAC/ 6.8ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 		
9	HOLD UP TIME (Typ.)	230VAC/40ms 115VAC/35ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 41.2ms 115VAC/36.8 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 		
10	DYNAMIC LOAD	V1: 2400 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	330mVp-p 244mVp-p
FULL /50% LOAD 50%DUTY / 120HZ 		FULL /50% LOAD 50%DUTY / 1KHZ 		
11	TRANSIENT RECOVERY TIME	V1: 2400 mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	241mVp-p 240us

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85~132VAC/170~264VAC by switch 240 ~ 370VDC (switch on 230VAC)	I/P:TESTING O/P:FULL LOAD Ta:25°C	80V~132V 137V~264V 230 ~ 370VDC (switch on 230VAC)
			I/P: (1)LOW-LINE-3V=82V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.7A 115V/ 3.0 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =1.24A/ 230VAC I =2.35A/ 115VAC
4	LEAKAGE CURRENT	< 0.75mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.411mA N-FG : 0.411mA
5	NO LOAD CONSUMPTION	< 0.5 W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.2992W < 0.4542W
6	EFFICIENCY(Typ.)	89 %	I/P:230 VAC O/P:FULL LOAD Ta:25°C	89.23%

EFFICIENCY vs LOAD



7	INRUSH CURRENT(Typ.)	230V/60A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I=36A/ 230VAC T50=1030 us/230V
INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A) 				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 140 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	118.61%/ 264VAC 118.77%/ 230VAC 120.61%/100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	28.8 V~ 33.6 V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	31.7V/ 264VAC 31.7V/ 230VAC 31.6V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated :13 A/600V VGS :± 25 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (4) 0%→400% Load. I/P:Low-Line -3V = 97V O/P: (1)Full Load (2)Output Short (3) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (4) 0%→400% Load. Ta:25°C	VDS: (1) 562V (2) 472V (3) 578V (4) 574V VDS: (1) 448V (2) 394V (3) 444V (4) 480V
4	Diode Peak Voltage	Q101 Rated :20A/150 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (4) 0%→400% Load. (5).NO LOAD Ta:25°C	Q101: VDS: (1) 142V (2) 148V (3) 141V (4) 147V (5) 136V
5	Input Capacitor Voltage	C5 Rated: : 330 μ/200 V 105 °C Suger Voltage=230V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1) 154V (2) 156V (3) 156V
6	Control IC Voltage Test	PWM IC U1 Rated : 28 V(MAX.) 10.5 V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR 下限.LOW LINE Ta:25°C	(1) 20.8V (2) 12.2V (3) 20.3V (4) 26.1V (5) 16.5V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25°C	I/P-O/P: 3.167mA I/P-FG: 3..51mA O/P-FG: 3.36m A NO DAMAGE

2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG:500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P:9999M Ω I/P-FG: 9999M Ω O/P-FG:9999M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25°C	28m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:80% LOAD Ta:25°C	PASS
				
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																
1	TEMPERATURE RISE TEST	MODEL : LRS-150-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=25.5℃ 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=45.3℃ <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 25.5 °C</th><th>HIGH AMBIENT Ta=45.3 °C</th></tr><tr><td>1</td><td>D5</td><td>87.8℃</td><td>100.6℃</td></tr><tr><td>2</td><td>C35</td><td>63.3℃</td><td>79.4℃</td></tr><tr><td>3</td><td>Q1</td><td>80.9℃</td><td>99.3℃</td></tr><tr><td>4</td><td>BD1</td><td>72.3℃</td><td>88.2℃</td></tr><tr><td>5</td><td>Q100</td><td>86.3℃</td><td>105.3℃</td></tr><tr><td>6</td><td>C106</td><td>68.5℃</td><td>85.9℃</td></tr><tr><td>7</td><td>LF1</td><td>60.3℃</td><td>77.0℃</td></tr><tr><td>8</td><td>RTH10</td><td>60.5℃</td><td>76.5℃</td></tr><tr><td>9</td><td>R14</td><td>79.2℃</td><td>95.1℃</td></tr><tr><td>10</td><td>T1</td><td>82.2℃</td><td>97.8℃</td></tr><tr><td>11</td><td>TA</td><td>25.5℃</td><td>45.3℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 25.5 °C	HIGH AMBIENT Ta=45.3 °C	1	D5	87.8℃	100.6℃	2	C35	63.3℃	79.4℃	3	Q1	80.9℃	99.3℃	4	BD1	72.3℃	88.2℃	5	Q100	86.3℃	105.3℃	6	C106	68.5℃	85.9℃	7	LF1	60.3℃	77.0℃	8	RTH10	60.5℃	76.5℃	9	R14	79.2℃	95.1℃	10	T1	82.2℃	97.8℃	11	TA	25.5℃	45.3℃
NO	Position	ROOM AMBIENT Ta= 25.5 °C	HIGH AMBIENT Ta=45.3 °C																																																	
1	D5	87.8℃	100.6℃																																																	
2	C35	63.3℃	79.4℃																																																	
3	Q1	80.9℃	99.3℃																																																	
4	BD1	72.3℃	88.2℃																																																	
5	Q100	86.3℃	105.3℃																																																	
6	C106	68.5℃	85.9℃																																																	
7	LF1	60.3℃	77.0℃																																																	
8	RTH10	60.5℃	76.5℃																																																	
9	R14	79.2℃	95.1℃																																																	
10	T1	82.2℃	97.8℃																																																	
11	TA	25.5℃	45.3℃																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 120 % LOAD Ta : 25℃	TEST : OK																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -25 °C	TEST : OK																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																

5	TEMPERATURE COEFFICIENT	$\pm 0.03\%/^{\circ}\text{C}(0\sim 50^{\circ}\text{C})$	I/P : 230 VAC O/P : FULL LOAD	$\pm 0.006\%/^{\circ}\text{C}(0\sim 50^{\circ}\text{C})$
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 2. Temperature change rate : $25^{\circ}\text{C} / \text{MIN}$ 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$ 2. Temperature change rate : $25^{\circ}\text{C} / \text{MIN}$ 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50°C LIFE TIME		(1) 146770HRS (2) 30596HRS (3) 54079HRS (4) 92239HRS
10	MTBF	2707.7K hrs min. Telcordia SR-332 (Bellcore) ; 558.2Khrs min. MIL-HDBK-217F (25°C)		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C		

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014